

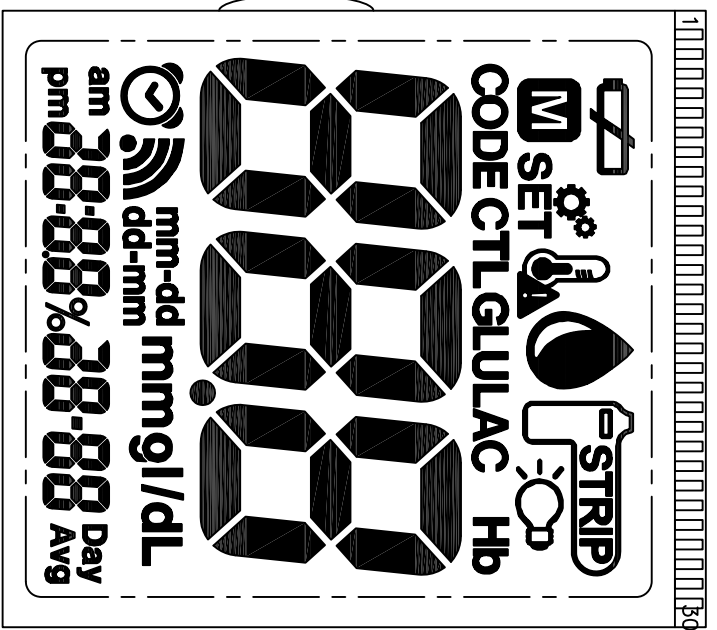


确认此型号所有图纸 签字确认:

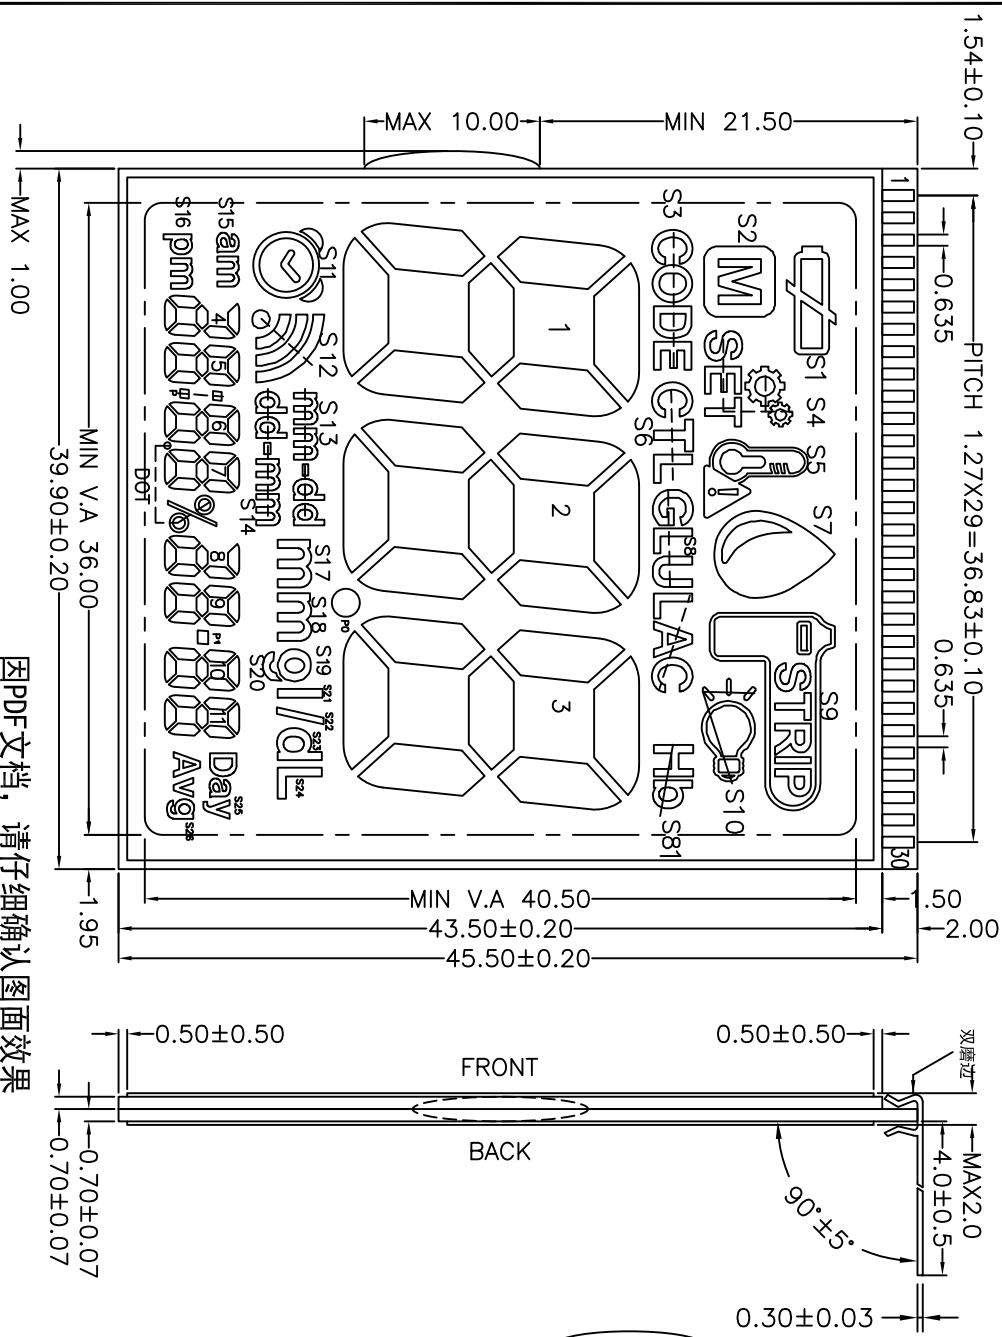

显示效果图

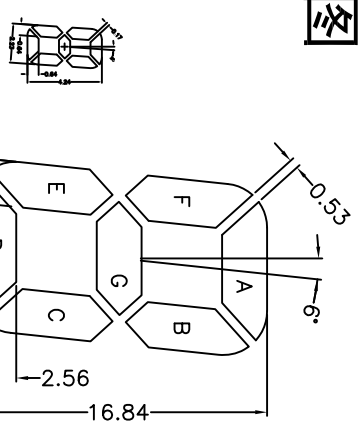

因PDF文档，请仔细确认图面效果

PM	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
COM1 DOT	S16	S13	7D	S12	6D	P	5D	4C	S11	1D	S2	S1	COM1					2D	P0	3D	LAC	S23	S26	S20	11D	S19	10D	P1	9D	S18
COM2 8E	S15	7C	7E	6C	6E	5C	5E	4G	1C	1E	S4	S5		COM2				2E	2C	3E	3C	S24	S25	11C	11E	10C	10E	9C	9E	8C
COM3 S81	S14	7G	7F	6G	6F	5G	5F	4B	1G	1F	S3	S7		COM3				2F	2G	3F	3G	S10	S22	11G	11F	10G	10F	9G	9F	8G
COM4 8AD	S17	7B	7A	6B	6A	5B	5A	4AD	1B	1A	S6	S8		COM4	2A	2B	3A	3B	S9	S21	11B	11A	10B	10A	9B	9A	8B			

1. 显示类型	HTN, POSITIVE	6. 驱动条件	1/4 DUTY 1/3 BIAS	DATE	REVISION RECORD	REV	LUMMAX ELECTRONICS CO., LTD									
2. 视向	6 0'CLOCK	7. 工作温度	-10°C ~ +60°C	12/18	按客户要求，原图面重新走线	B										
3. 工作电压	3.3 V	8. 储存温度	-20°C ~ +70°C				DRAWING NO.	GHO946	UNIT	mm	PK0					
4. 偏光片类型	REFLECTIVE	9. 客服资料	SDL-H05912POH-0 G500				DRAWING BY	CHECKED BY	APPROVED BY	PAGE						
5. 连接方式	PIN	10. 玻璃结构	小片在上，大片在下				LXH	2014/12/18	1/2							