





SYM	REV	DESCRIPTION	DATE
01	First issue		Jun-10-2011

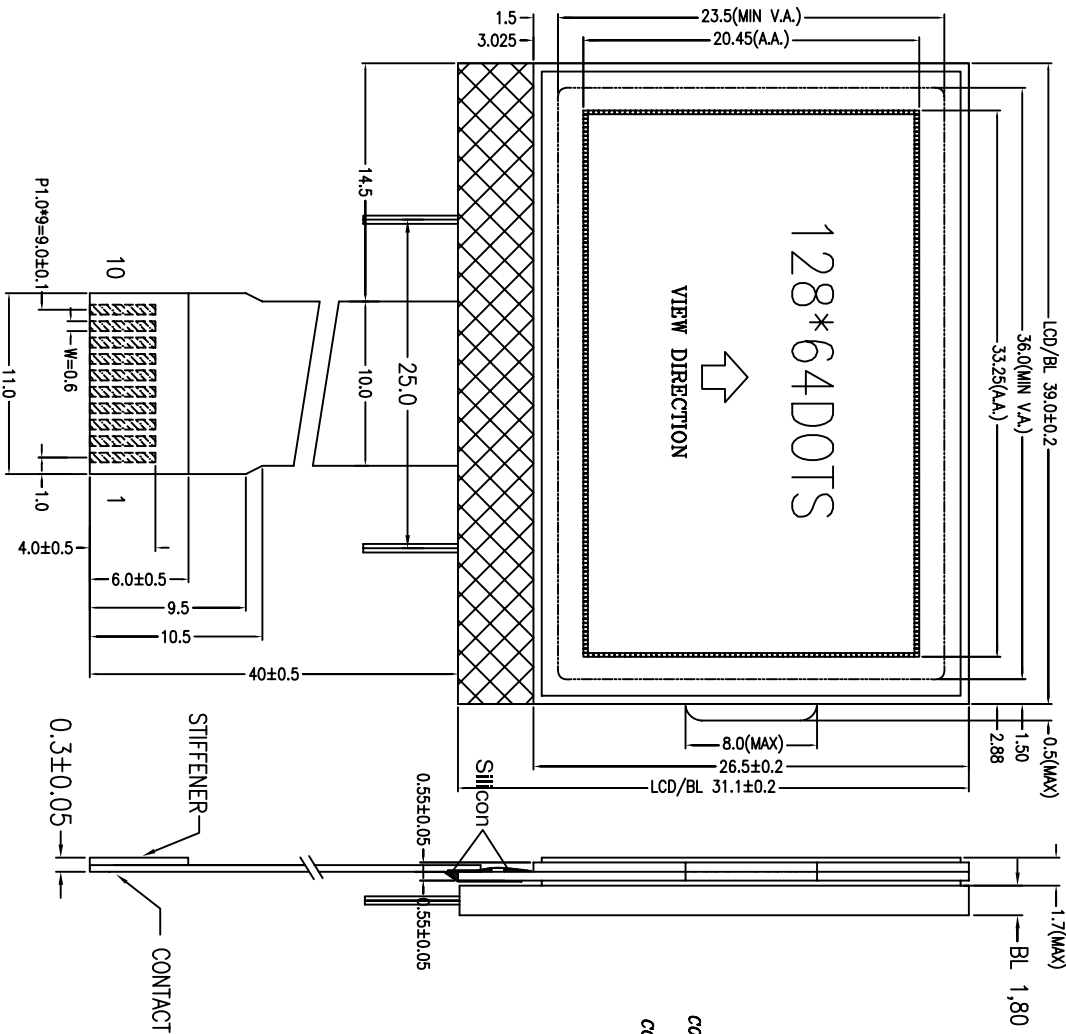

接口及外围连接

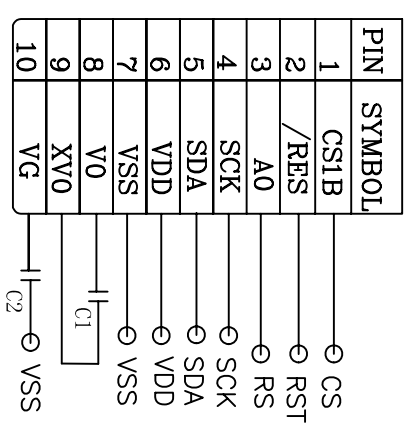

C1~C2用1uF/16V 电容

NOTES:

1. DISPLAY TYPE: FSTN/POSITIVE
2. OPERATING VOLTAGE: VDD=3.3V, VLCD=9.0V
3. OPERATING TEMPERATURE: -10°C~60°C
4. STORAGE TEMPERATURE: -20°C~70°C
5. DRIVE MODE: 1/64D, 1/9B
6. VIEWING DIRECTION: 6:00
7. POLARIZER TYPE: TRANSMISSIVE
8. CONNECTOR: COG/ST7567
9. CUSTOMER No.:

TITLE:	CD		LUMMAX ELECTRONICS CO., LIMITED
Draw:	XQC	MODEL:	HEM12864-70L
CHK:		UNIT:	mm
App:		SCALE:	
			GENERAL TOL: ±0.2
			SHEET NO: 1/1