

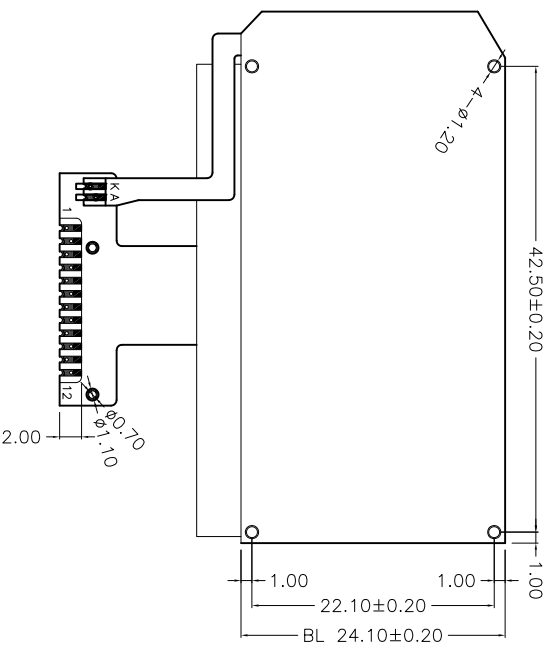
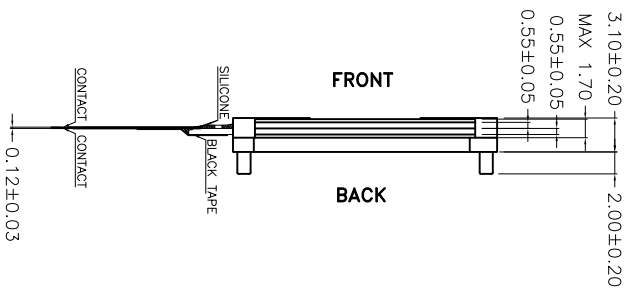
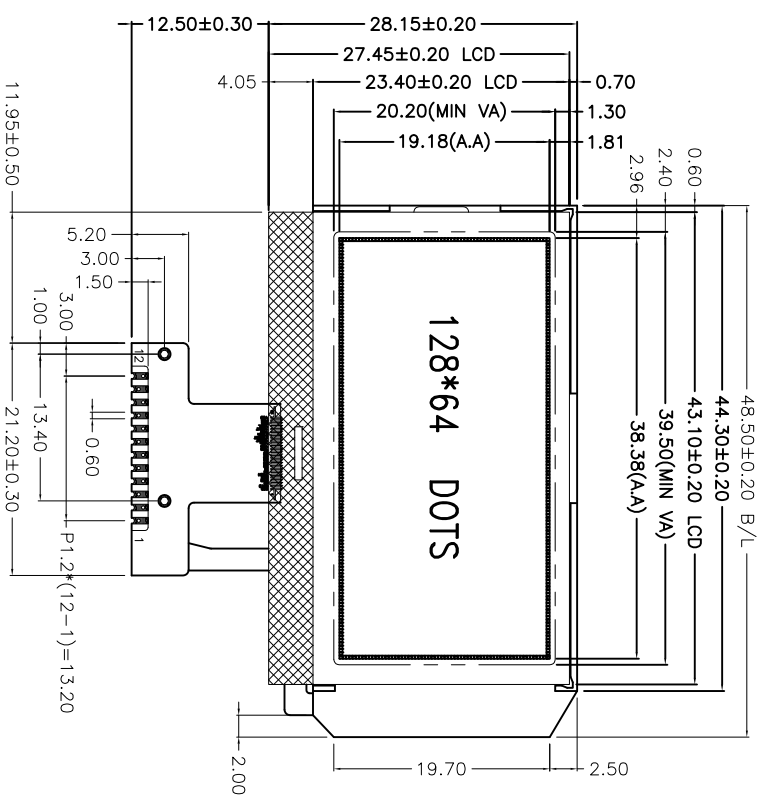



REV.	DESCRIPTION	REVISER	DATE
A0	First Issue	luojinwei	2015.03.24



PIN	SYMBOL
1	K-
2	A+
3	CSB
4	RST
5	AO
6	SCL
7	SDA
8	VDD
9	VSS
10	VO
11	XVO
12	VG



# LUMMAX ELECTRONICS CO.,LTD

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODEL NUMBER:	PROJECTION	SHEET:	DATE:
DESIGN BY:	luojinwei	2015.03.24	HFG12864-185-PFDSW-R-A0			1 OF 1	2015.03.24
CHECKED BY:			DO NOT SCALE THIS DRAWING.				

- Specifications:
1. Display Mode: FSTN/Transflective/Positive.(高半透)
  2. Viewing Angle: 6:00 O'clock.
  3. Drive Method: 1/64 Duty, 1/9 Bias, Vop=9.2V(Sample), Vdd=3.0V.
  4. Top: -20°C~+70°C, Tst: -30°C~+80°C.
  5. Connector: COG+FPIC.
  6. Drive IC: ST7567
  7. Backlight: 2PCS WHITE LEDS, If=30mA & Vf=3.0±0.10V
  8. With " \* " Mark Dimensions Are Important Dimensions.