



INTERFACE	
1	LED-K
2	LED-A(GV)
3	VSS
4	VDD(GV)
5	V0
6	RS
7	RW
8	E
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7

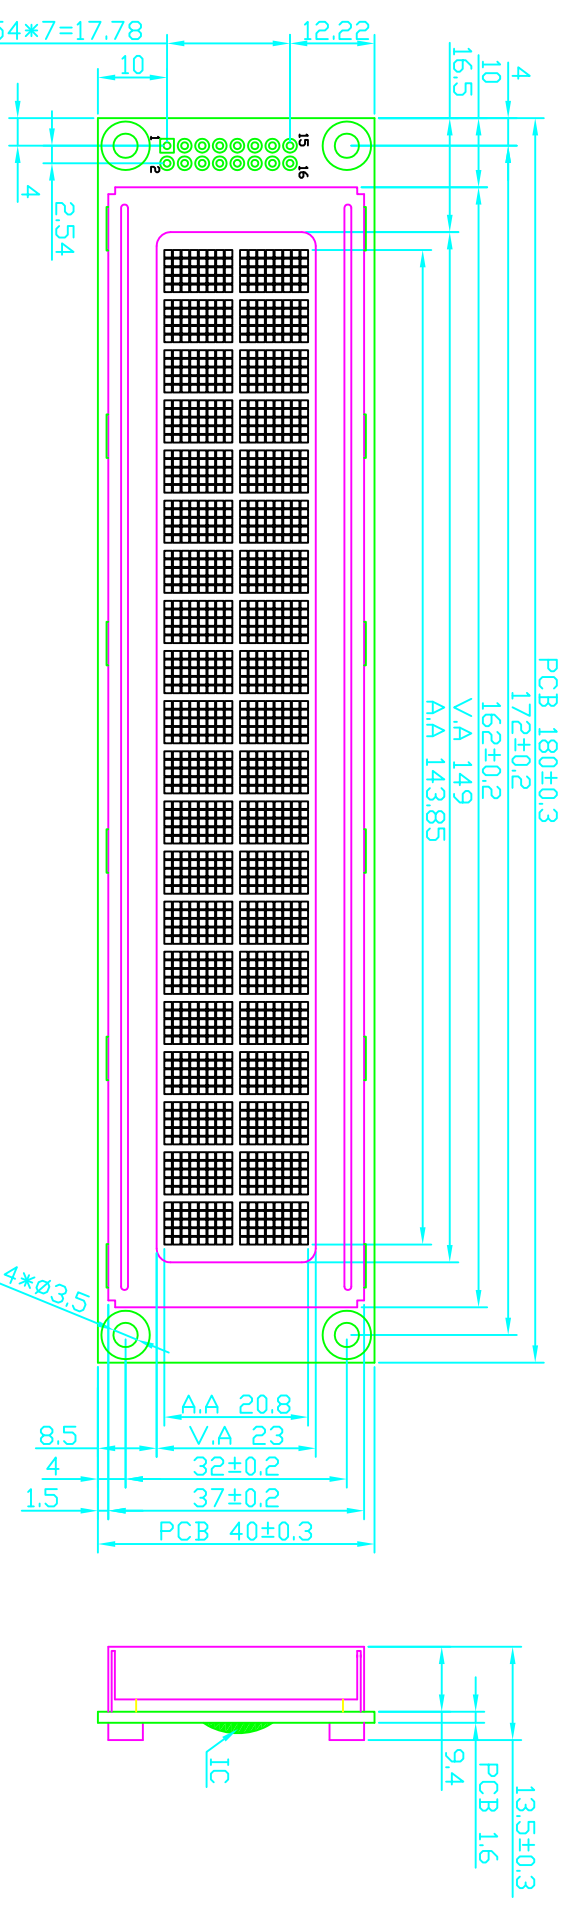

SPECIFICATION:

- 1). STN(Y-G)/POSITIVE/TRANSFLECTIVE
- 2). DUTY: 1/16, BIAS: 1/5, VOP=4.5V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C  
STORAGE TEMPERATURE: -30~80°C
- 5). BACKLIGHT: Y-G I=110MA
- 6). DRIVE POWER: VDD=5.0V

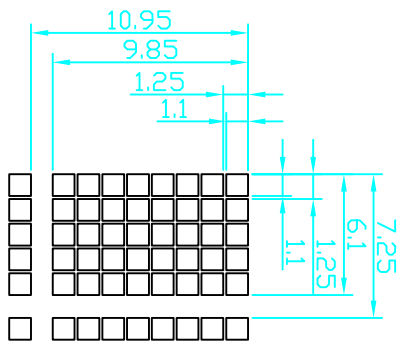

LUMMAX ELECTRONICS CO., LTD

Unspecified Tolerances:	±0.20	UNIT'S: mm	DATE:	MODE NUMBER:	PROJECTION	SHEET:
DESIGN BY:	WZQ		2011/1/22	HSM2002B-Y		1 OF 1
CHECKED BY:						DATE:
CUSTOM NO.:						2011/1/22

DO NOT SCALE THIS DRAWING.