


确认此型号所有图纸，签字确认：

4.0	2.0	修改记录
5.0	3.0	

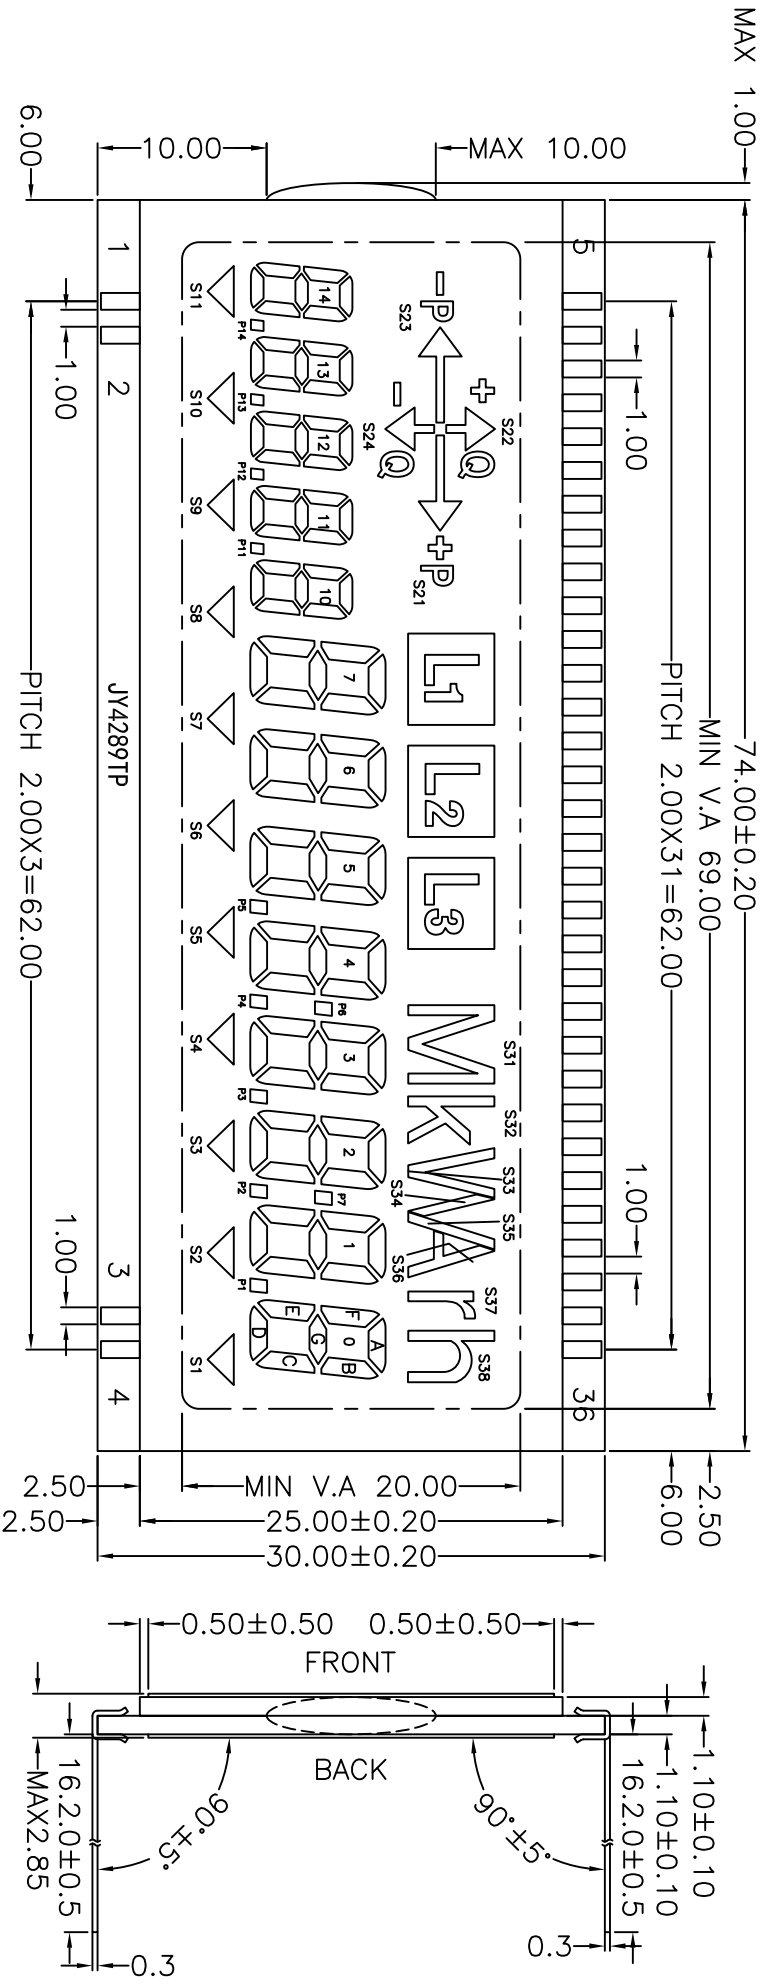

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
BP0				BP0	S24	14A	14B	13A	13B	12A	12B	11A	11B	10A	10B	S21	7A	7B	6A	6B	L1	5A	5B	4A	4B	3A	3B	2A	2B	1A	1B	0A	0B	L3	S32	S34
BP1					S22	14F	14G	13F	13G	12F	12G	11F	11G	10F	10G	S23	7F	7G	6F	6G	L2	5F	5G	4F	4G	3F	3G	2F	2G	1F	1G	0F	0G	S31	S33	S35
BP2				BP2	S11	14E	14C	13E	13C	12E	12C	11E	11C	10E	10C	S6	7E	7C	6E	6C	P6	5E	5C	4E	4C	3E	3C	2E	2C	1E	1C	0E	0C	P7	S2	S36
BP3					S10	14D	P14	13D	P13	12D	P12	11D	P11	10D	S7	S8	7D	S9	6D	S5	S4	5D	P5	4D	P4	3D	P3	2D	P2	1D	P1	0D	S38	S3	S1	S37

- NOTES:
1. DISPLAY TYPE: TN
 2. LCD OPERATING VOLTAGE: 2.8V
 3. OPERATING TEMPERATURE: -30°C TO +80°C
 4. STORAGE TEMPERATURE: -40°C TO +85°C
 5. DRIVE MODE: 1/4 DUTY, 1/3 BIAS
 6. VIEWING DIRECTION: 6 O'CLOCK
 7. POLARIZER TYPE: TRANSFLECTIVE POSITIVE
 8. CONNECTOR: PIN
 9. CUSTOMER NO.: SDS-1301
 10. CUSTOMER CODE: M0021
 11. Unspecified tolerance is ±0.2mm

SHEET NO: 1 OF 3	LUMMAX ELECTRONICS CO.,LTD
DRAW: CYY	LCD NO: GH04289TP
CHECKED: ZHOU	
APPROVED:	REV 1.0
UNITS: mm	DATE: 2015-08-19