


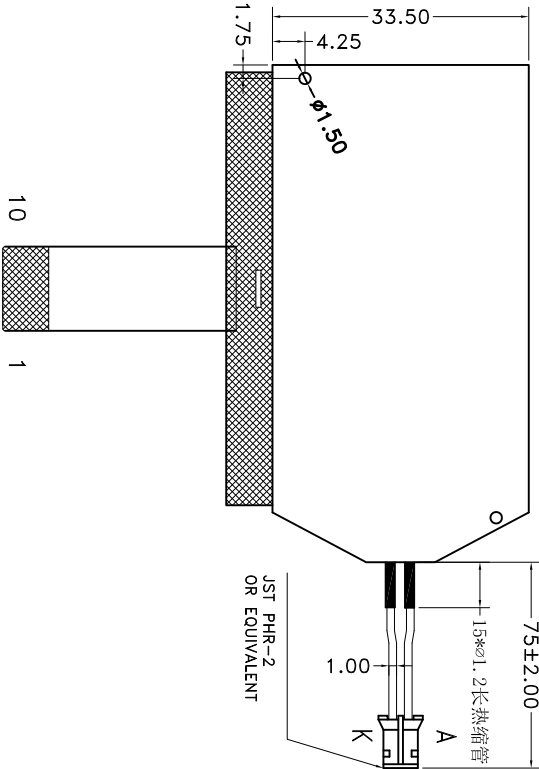
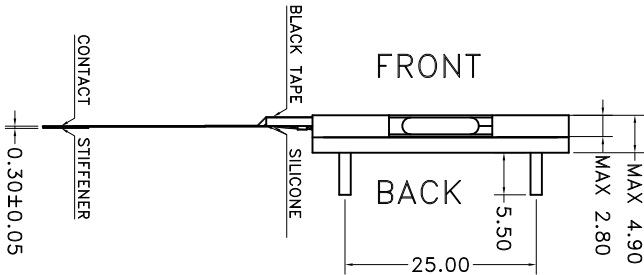


REV.	DESCRIPTION	REVISER	DATE
A0	新出图	luojinwei	2014.8.26

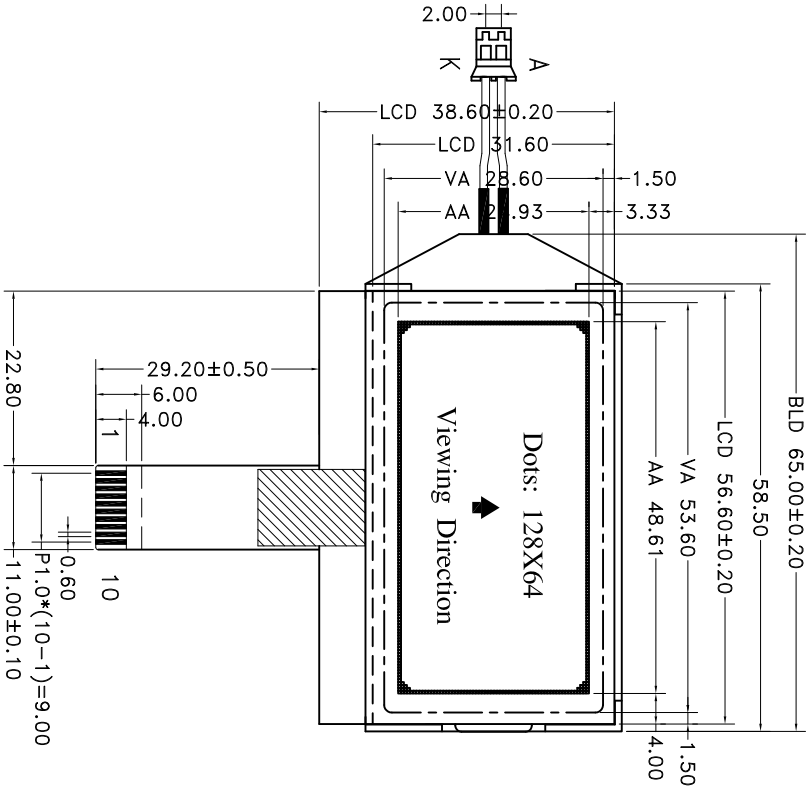

Specifications:

1. Display Mode: STN(Yellow-Green), Transmissive/Positive.
2. Viewing Angle: 6 0'clock.
3. Drive Method: 1/64 Duty 1/7 Bias, Vop= 8.2V, Vdd= 2.8V.
4. Top: -10°C~+60°C, Tst: -20°C~+70°C.
5. Connector: COG+FFC.
6. Drive IC: ST7567(or other compatible IC)
7. Backlight: 1 PCS Green LED Backlight,I_f=20mA & V_f=3.0±0.1V
8. Wavelength: 515-525nm, Luminance: Min 100 cd/m², Uniformity: 70%
9. RoHS Compliant: Yes.
10. With " * " Mark Dimensions Are Important Dimensions.

LUMMAX ELECTRONICS CO.,LTD

Unspecified	±0.20	UNITS: mm	DATE:	MODEL NUMBER:	PROJECTION	SHEET:	1 OF 1
DESIGN	BY:	luojinwei	2014.8.26	HSG12864-144-YTDSG-R-A0			
CHECKED	BY:					DATE:	2014.8.26
DO NOT SCALE THIS DRAWING.							