
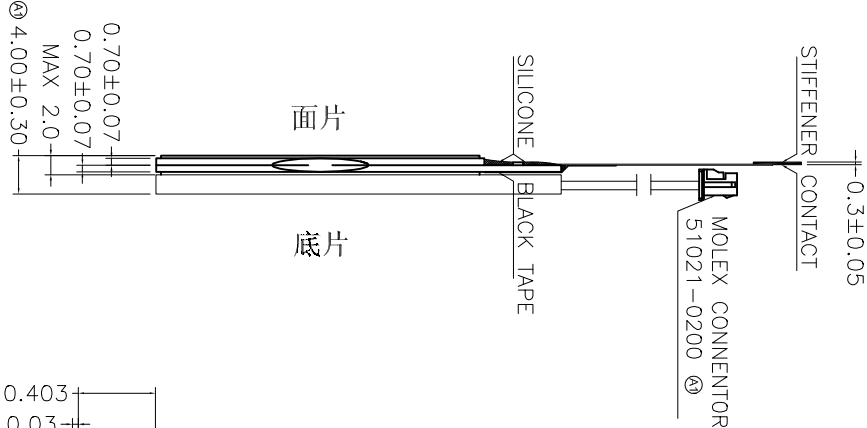




Signature:

Date:

REV.	DESCRIPTION	REVISER	DATE
A0	First issue	luojinwei	2014.05.28
A1	改背光结构	luojinwei	2014.06.04

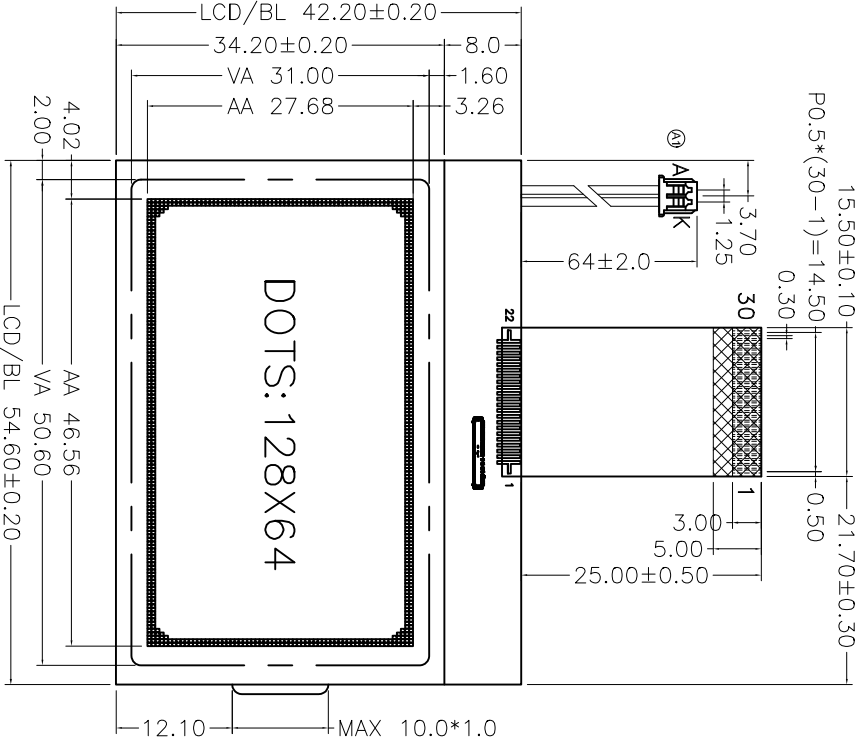

PIN	SYMBOL	PIN	SYMBOL
1	NC	16	D5
2	NC	17	D4
3	NC	18	D3/SDA
4	NC	19	D2
5	VOUT	20	D1
6	VB0+	21	D0/CLK
7	VB0-	22	WR1
8	VB1-	23	WR0
9	VB1+	24	CD
10	VSS	25	RST
11	VDD(3.0V)	26	/CS
12	BM1	27	NC
13	BMO	28	NC
14	D7	29	NC
15	D6	30	NC



DOTS SIDE SCALE 20:1

LCD LAYOUT

Specifications:

1. Display Mode: FSTN, Transflective/Positive.
2. Viewing Angle: 6.0'clock.
3. Drive Method: 1/65 Duty 1/9 Bias, Vop= 9.7V, Vdd= 3.0V.
4. Top: -20°C~+70°C, Tst: -30°C~+80°C.
5. Connector: COG+FFC.
7. Drive IC: UC1601X
8. Backlight: 4PCS WHITE LEDs, If=60mA & Vf=5.0±0.10V ⑧
- Luminance:>400cd/m2(Backlight Surface).Uniformity: >75%.
9. With” * ” Mark Dimensions Are Important Dimensions.

LUMMAX ELECTRONICS CO.,LTD

Unspecified Tolerance:	±0.20	UNIT'S: mm	DATE:	MODEL NUMBER :		SHEET:	1 OF 1
DESIGN BY:	luojinwei	2014.05.28		HFG12864-127-PFDSW-R-A1		DATE:	2014.05.28
CHECKED BY:							
DATE:	2014.05.28						