

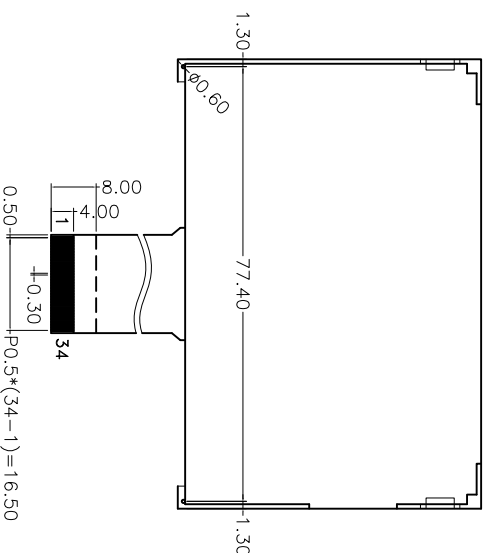





REV.	DESCRIPTION	REVISER	DATE
A0	First issue	luojinwei	2014.06.11

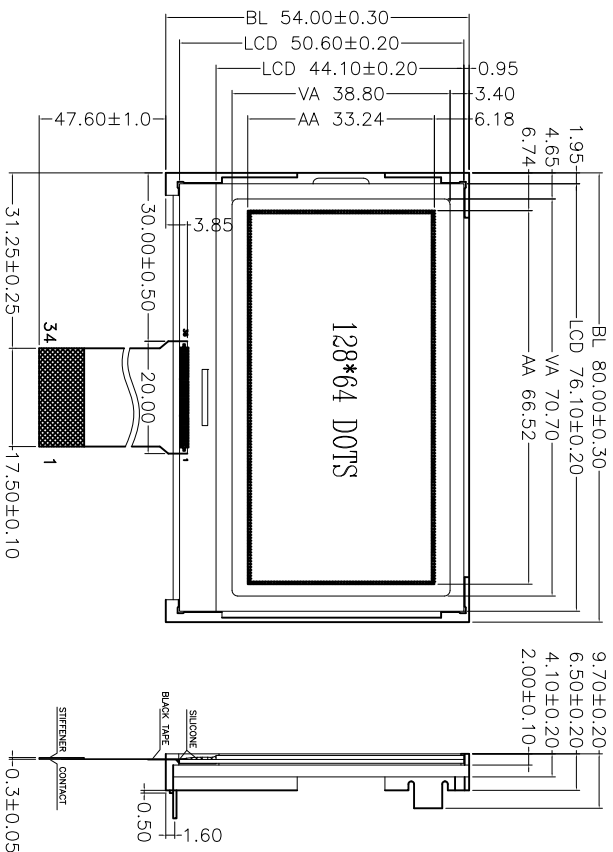

PIN	SYMBOL	PIN	SYMBOL
1	/CS1	18	CAP3-
2	/RES	19	CAP1+
3	A0	20	CAP1-
4	R/W/($\overline{\text{WR}}$)	21	CAP2-
5	E/(RD)	22	CAP2+
6	DB0	23	CAP4-
7	DB1	24	VRS
8	DB2	25	V1
9	DB3	26	V2
10	DB4	27	V3
11	DB5	28	V4
12	DB6	29	V5
13	DB7	30	VR
14	VDD	31	C86
15	VSS	32	P/S
16	VOUT	33	HPMB
17	CAP5-	34	IRS

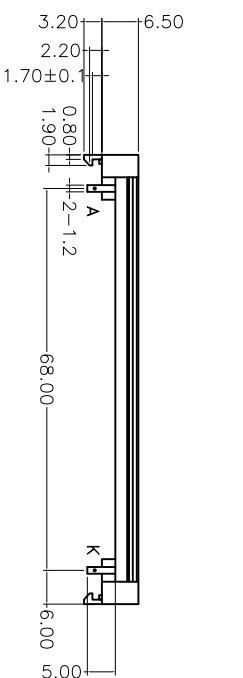

- Specifications:
1. Display Mode: FSTN/Transflective/Positive.
 2. Viewing Angle: 6 0'clock.
 3. Drive Method: 1/65 Duty 1/9 Bias, Vop=9.9V, Vdd=3.0V.
 4. Top: -20°C~+70°C, Tst: -30°C~+85°C.
 5. Connector: COG+FPIC.
 7. Drive IC: ST7565V-G
 8. Backlight: 8PCS BLUE LEDs, If=80mA & Vf=3.0±0.10V
 9. With " * " Mark Dimensions Are Important Dimensions.



LUMMAX ELECTRONICS CO.,LTD

未出图 未出图 Autodesk	Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODEL NUMBER : 	SHEET: 1 OF 1	
	DESIGN	BY: luojinwei	2014.06.11	HFG12864-131-PFDSB-R-A0			
	CHECKED	BY:				PROJECTION	DATE: 2014.06.11
	DO NOT SCALE THIS DRAWING.						